

This document is made available through the declassification efforts and research of John Greenewald, Jr., creator of:



The Black Vault is the largest online Freedom of Information Act (FOIA) document clearinghouse in the world. The research efforts here are responsible for the declassification of MILLIONS of pages released by the U.S. Government & Military.

Discover the Truth at: http://www.theblackvault.com

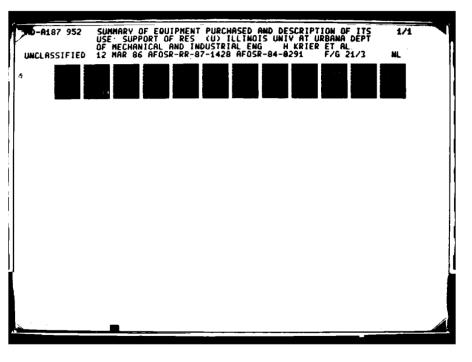



MERCEORY RESOLUTION TEST CHART TROC 1961 A

6.669

N	TDOCUM	ENTATION PAGE	
AD-A187 95	52	10. RESTRICTIVE MARKINGS NONE	TY OF REPORT
28. DECLASSIFICATION/DOWNGRADING SCHED	U_E	APPROVED FOR PUBLI DISTRIBUTION UNLIM	C RELEASE:
PERFORMING ORGANIZATION REPORT NUM	BER(S)	5. MONITORING ORGANIZATIO	
UNIVERSITY OF ILLINOIS AT URBANA CHAMPAIGN	66. OFFICE SYMBOL (If applicable) UILU	7. NAME OF MONITORING OR	GANIZATION F SCIENTIFIC RESEARCH
DEPT. UF MECH. AND IND. ENGINEE 144 MEB; 1206 WEST GREEN STREET URBANA, IL 61801	• -	76. ADDRESS (City, State and ZIF ATTN: DR. JULIAN BOLLING AFB	TISHKOFF
B. NAME OF FUNDING/SPONSORING ORGANIZATION AIR FORCE OFFICE	B. OFFICE SYMBOL Il applicable	9. PROCUREMENT INSTRUMEN	
OF SCIENTIFIC RESEARCH BC ADDRESS (City, State and ZIP Code)	AFOSR/()H	AFOSR GRANT NO. 84	
AFOSR/NA/2 DR. JULIAN TISHKOFF BOLLING AFB. DC 20332		PROGRAM PROJEC ELEMENT NO. NO.	T TASK WORK
11 TITLE (Include Security Classification) SUMMAR PURCHASED		and Descrip	stipn of its us
HERMAN KRIER, JYOTI MAZUMDER,	AND RONALD J.	ch in Beamed C GLUMB	nergy tropuls
134 TYPE OF REPORT 136. TIME CO	1784 TO 3/1/86	14. DATE OF REPORT (Yr., Mo.,	Day) 15. PAGE COUNT
FINAL FROM	¥		<u> </u>
17 COSATI CODES	18 SUBJECT/TERMS	Continue on reverse if necessary and i	dentify by block numbers
FIELD GROUP SUB GR	DIAGNOSTIC I	EQUIPMENT, FOR TEMPERATURE ENERGY, PROPULSION	JRE MEASUREMENT
19. ABSTRACT (Continue on reverse if necessary and This report presents the of that equipment, and how the study of plasmas formed from h the University Research Instru dynamic and heat transfer asso	description of equipment is t igh energy lase mentation Progr	the diagnostic equipme being utilized to carry ers. The program was f ram (URIP). Important ser sustained plasmas a	/ out research in the funded by DoD as part results of the therma
20. DISTRIBUTION/AVAILABILITY OF ABSTRAC	T	21. ABSTRACT SECURITY CLAS	
UNCLASSIFIED/UNLIMITED C SAME AS APT	C OTIC USERS	UNCLASSIFIED	
		225 TELEPHONE NUMBER	22c. OFFICE SYMBOL
22. NAME OF RESPONSIBLE INDIVIDUAL		(Include Area Code)	

FINAL TECHNICAL REPORT:

AFOSR . TR. 87-1428

Accession For

SUMMARY OF EQUIPMENT PURCHASED AND DESCRIPTION OF ITS USE: SUPPORT OF RESEARCH IN BEAMED ENERGY PROPULSION

AFOSR Grant No. 84-0291[‡] (University Research Instrumentation Program: URIP)

Prepared by

R S Herman Krier⁽¹⁾, Jyoti Mazumder⁽¹⁾, Ron J. Glumb⁽²⁾ Department of Mechanical and Industrial Engineering University of Illinois at Urbana-Champaign 144 MEB; 1206 West Green Street Urbana, IL 61801

- March 1986 -

<pre>(*)Dr. Leonard H. Caveny was Program Director AFOSR/NP. Dr. Julian Tishkoff is now acting Director on this activity.</pre>	NTIS GRAAI DTIC TAB Unannounced Justification	
<pre>(1)Co-Principal Investigators (2)Ph.D Candidate; ONR Fellow</pre>	By Distribution/ Availability Cod	
	Dist Special	

OVERVIEW

The equipment purchased under Grant AFOSR 84-291 has been used in a series of experiments funded by the Air Force Office of Scientific Research to study a new form of orbit-raising rocket propulsion: laser propulsion. A complete report documenting the progress and results of these experiments has been submitted along with this document (Annual Report UILU ENG 86-4001).

Presented below is a brief summary of the purposes of the experimental program, followed by a discussion of how the purchased equipment has been used, and detailing some of the key results. This is then followed by a summary of the budgeted purchases.

I) Laser Propulsion Research

Laser propulsion is a potentially promising new form of rocket propulsion which makes use of a laser-sustained plasma (LSP) to convert laser energy into the thermal energy of a propellant gas. Complete studies of LSP's is necessary if the feasibility of laser propulsion is to be assessed.

In particular, it is necessary to completely map temperatures within the plasma core. Because of the extreme temperatures encountered (> 10,000 K), spectroscopic techniques are required. The plasma temperature maps can be used to calculate fractional absorption and radiative losses by the plasma, and to study the spectra of the radiative emissions.

It is also important to measure the fraction of the incident laser power that is retained by the gas as thermal energy. Only if a high fraction is retained by the propellant can laser propulsion be practical. These measurements are made by constructing temperature mappings of the downstream flowfield, where temperatures are the 2000-8000 K range.

II) Equipment Uses and Key Results

A) OMA Spectroscopic System

The EG&G OMA III spectroscopic system is used to record two-dimensional temperature mappings of the core of laser-sustained plasmas, at temperatures up to 20,000 K. The system consists of an automated controlling console, a detector controller, a silicon-intensified target detector, a monochromator for fine spectral resolution, fiber optics for remote measurements, and a gated power supply to record transient events.

A sample temperature mapping produced using the OMA is shown in Figure 1. The system has allowed accurate measurements to be made at a variety of laser power and flow conditions, revealing considerable detail concerning the nature and behavior of laser-sustained plasmas. The temperature scans have

also permitted comparison with the predictions of a theoretical model currently under development (see Figure 2), allowing us to test the basic assumptions used in the model.

In addition, it is possible to use the measured OMA temperature fields to calculate the percentage of the incident laser power that is absorbed and reradiated by the plasma. Such calculations have been performed, and the results compared to experimental measurements of absorption and thermal efficiency, as shown in Figure 3. The excellent agreement between the results, as well as the modeling predictions, confirm the validity of the independent measurement schemes.

The OMA system is also used to record the fluorescent emissions from seed molecules in the laser-induced fluorescence studies discussed in Section C.

A few related pieces of equipment were purchased along with the OMA III system. These include a Unislide assembly to allow translation of the detector to produce the 2-D maps, spectral calibration lamps to aid in alignment and spectral response of the detector, and gratings and imaging optics for the monochomator.

B) Additional Equipment

A small portion of the equipment budget has been used to purchase some additional equipment needed for fractional absorption measurements at high pressures and flow velocities. This equipment consists of a Polytran laser inlet window, used in tests at pressures up to four atmospheres, and NaCl windows, used in the high flow rate tests. A small storage oven was also purchased in which to store the laser windows to prevent fogging of the crystals in humid air.

Using this equipment, the global absorption data presented in Figure 4 was recorded. The data are important in evaluating what fraction of the laser power can be absorbed by the plasma, and in exploring the dependence of this property on pressure and flow rate.

C) Excimer/Dye Laser System for Planar Laser-Induced Fluorescence

One of the key parameters of the laser-sustained plasma is its ability to retain the absorbed laser energy in the form of thermal energy of the propellant gas. Such measurements have never before been attempted, and are crucial in evaluating the feasibility of laser propulsion.

We are now in the process of conducting such measurements, using laserinduced fluorescence (LIF) techniques. Basically stated, LIF is a process in which an electronic transition of a seed atom is excited by a pulse of laser energy from a tunable dye laser; the intensity of the fluorescent emission from the excited atom can then be used to calculate temperatures and flow velocities, both of which are necessary to measure thermal efficiency.

The excimer/dye laser system makes such measurements possible. The excimer laser is used to pump the dye laser, and the dye laser is used to excite the seed atoms. The wavelength of the dye laser output can be tuned to the transition of interest using the wavelength controller stepper motor. Additional optics for the excimer pump beam make it possible to work at a wider range of emission wavelengths.

To date, no efficiency measurements have as yet been completed. However, the LIF system is fully operational, and is now being tested through temperature and concentration measurements of methane flames. A schematic of the LIF system is presented in Figure 5.

III. Budget

A breakdown of equipment purchases is summarized on the following pages. A few differences between proposed and actual purchases should be noted.

Because the cost of the excimer/dye laser system was greater than expected, portions of the OMA III system were purchased using contract funding. This includes the SIT detector and detector controller. Also, several small components of the OMA system, such as the Unislide device, were not discussed in the proposed equipment purchases.

In addition, the purchase of Additional Equipment was not originally budgeted; these purchases were made after promising new areas of research became apparent during the preliminary stages of the experimental work.

BUDGET/INSTRUMENTATION

U A

A) Optical Multichannel Analyser (EG&G Princeton Applied Research)

Ø,

Model	Description	Price
1460R 1301 K0165 SC0059 1460/98 CE0002	OMA III Console w/Full Memory Optical Trigger Pickup Fiber Optic Kit OMA Interface Cable Winchester Disk Drive Keyboard	<pre>\$ 12,825.00 1,206.50 1,092.50 356.25 3,900.00 302.87</pre>
		\$ 19,683.12
Accessories for OMA System		
1228 	Monochromator (EGAG) Snectral Calibration Lamo Set	\$ 6,175.00
	(Oriel Corp.)	557.19
B4021BJ	Unislide Translation Stage w/Stepper Motor (Velmex, Inc.)	711.15
M092-FD08	Additional Stepper Motor (Graham Electronics)	140.00
;	Àdditional Electronics (Hamilton/Avnet Electronics)	106.59
4096,4098,4101	Imaging Lenses for Monochromator (Oriel Corp.)	495.00
21998	Grating for Monochromator (Instruments SA, Inc.)	500.00
HR320	Kinematic Mount (Instruments SA, Inc.)	230.00
		\$ 8,914.93

\$ 28,598.05

Sub-total for (A): \$19,683.12 + \$8,914.93 =

and the second second

BUDGET/INSTRUMENIATION (Continued)

B) Additional Experimental Equipment

Sodium Chloride Polytr 10 Sodium Chloride Las Storage Oven for NaCl	Polytran Crystal Laser Window (Harshaw/Filtrol) ide Laser Window Blanks (Harshaw/Filtrol) ^ NaCl Windows (American Scientific Products)	\$ 2,488.89 1,237.65 581.99
	Sub-total	\$ 4,308.53
C) Excimer Dye Laser (Lambda Physik)	Laser System for Laser-Induced Fluorescence Experiments .ik)	
Model	Description	Price
EMG 203M	Pulsed Excimer Laser 1004 Maximum Averade Power	8109.800.00
EMG 70-2	Unstable Resonator Optics for FMC 203 (KrF Oneration)	2,600,00
FL2002 FL22XeC1-H	Dye Laser Pumping Kit for Dye Laser	18,900.00
FL512	stepping motor controller for Dye Wavelength Selector	2,250.00
	Less Duty and Discount	- 11,000.00
	Sub-total	\$126,860.00
	Total Costs: \$28,598.05 + \$4,308.53 + \$126,860.00 =	\$159,766.58

5

- 9,766.58

Less Cost Sharing by Dept. of Mech. & Ind. Engr.

Final Costs

\$150,000.00

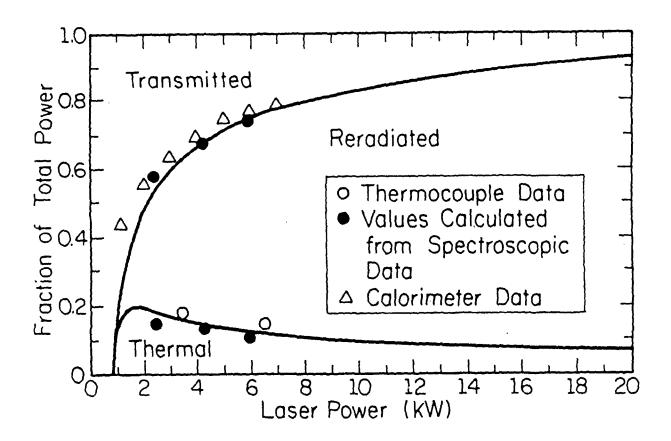


Figure 3 Experimental and Numerical Model Results for Global Absorption and Thermal Efficiency as a Function of Laser Power


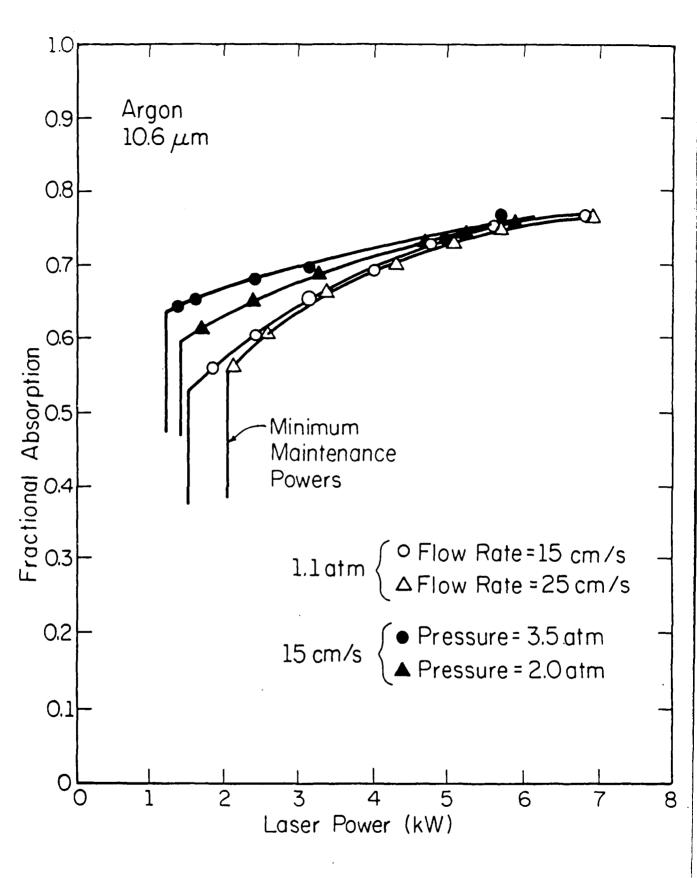


Figure 4 Global Absorption Data Taken at High Gas Pressures and Flow Velocities

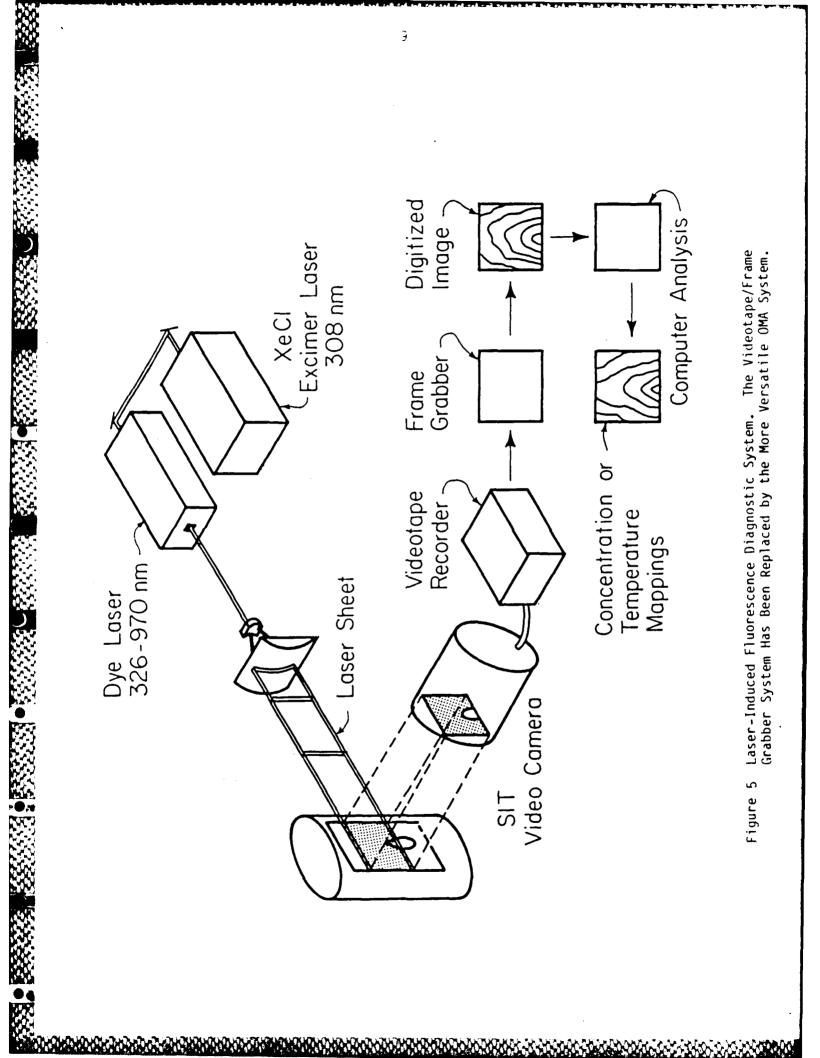

 \mathbb{N} HE D Z 98 DTIC